

FIG. 1

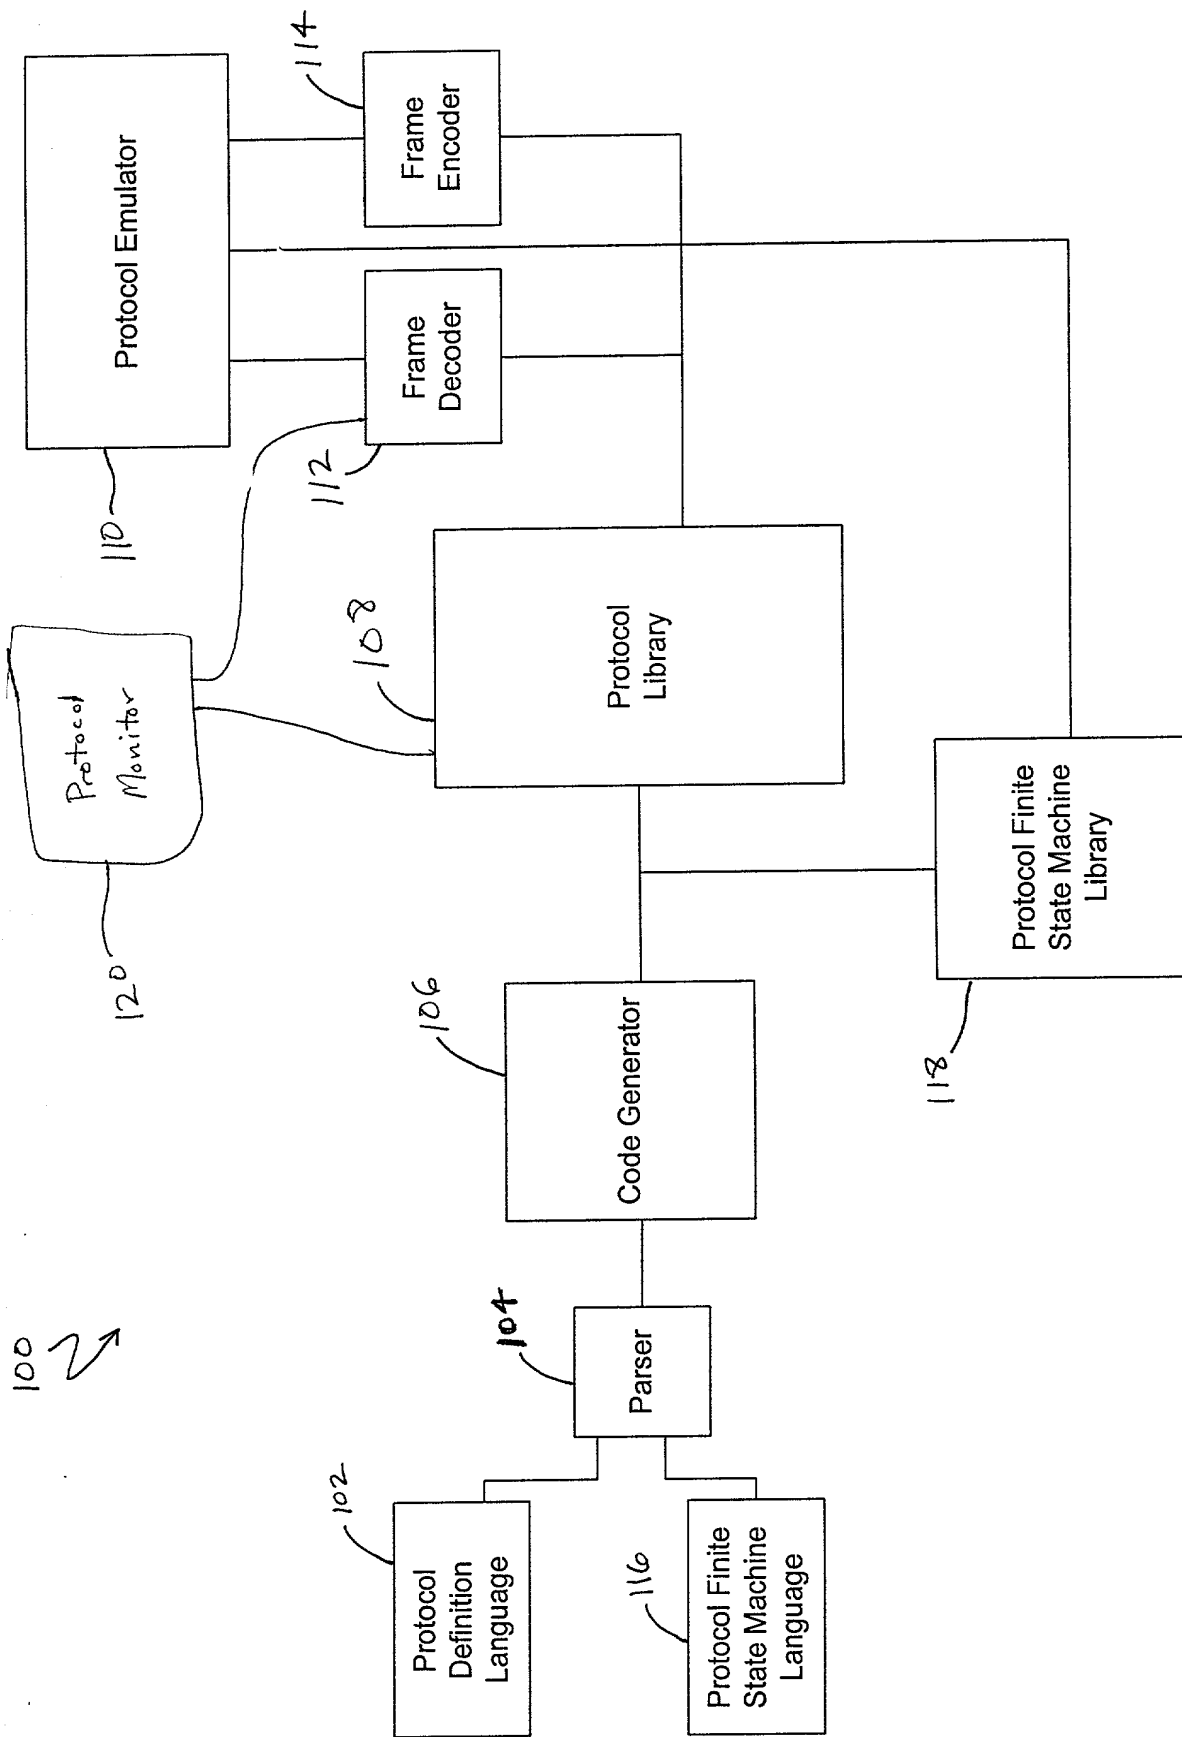


FIG. 2 (prior art)

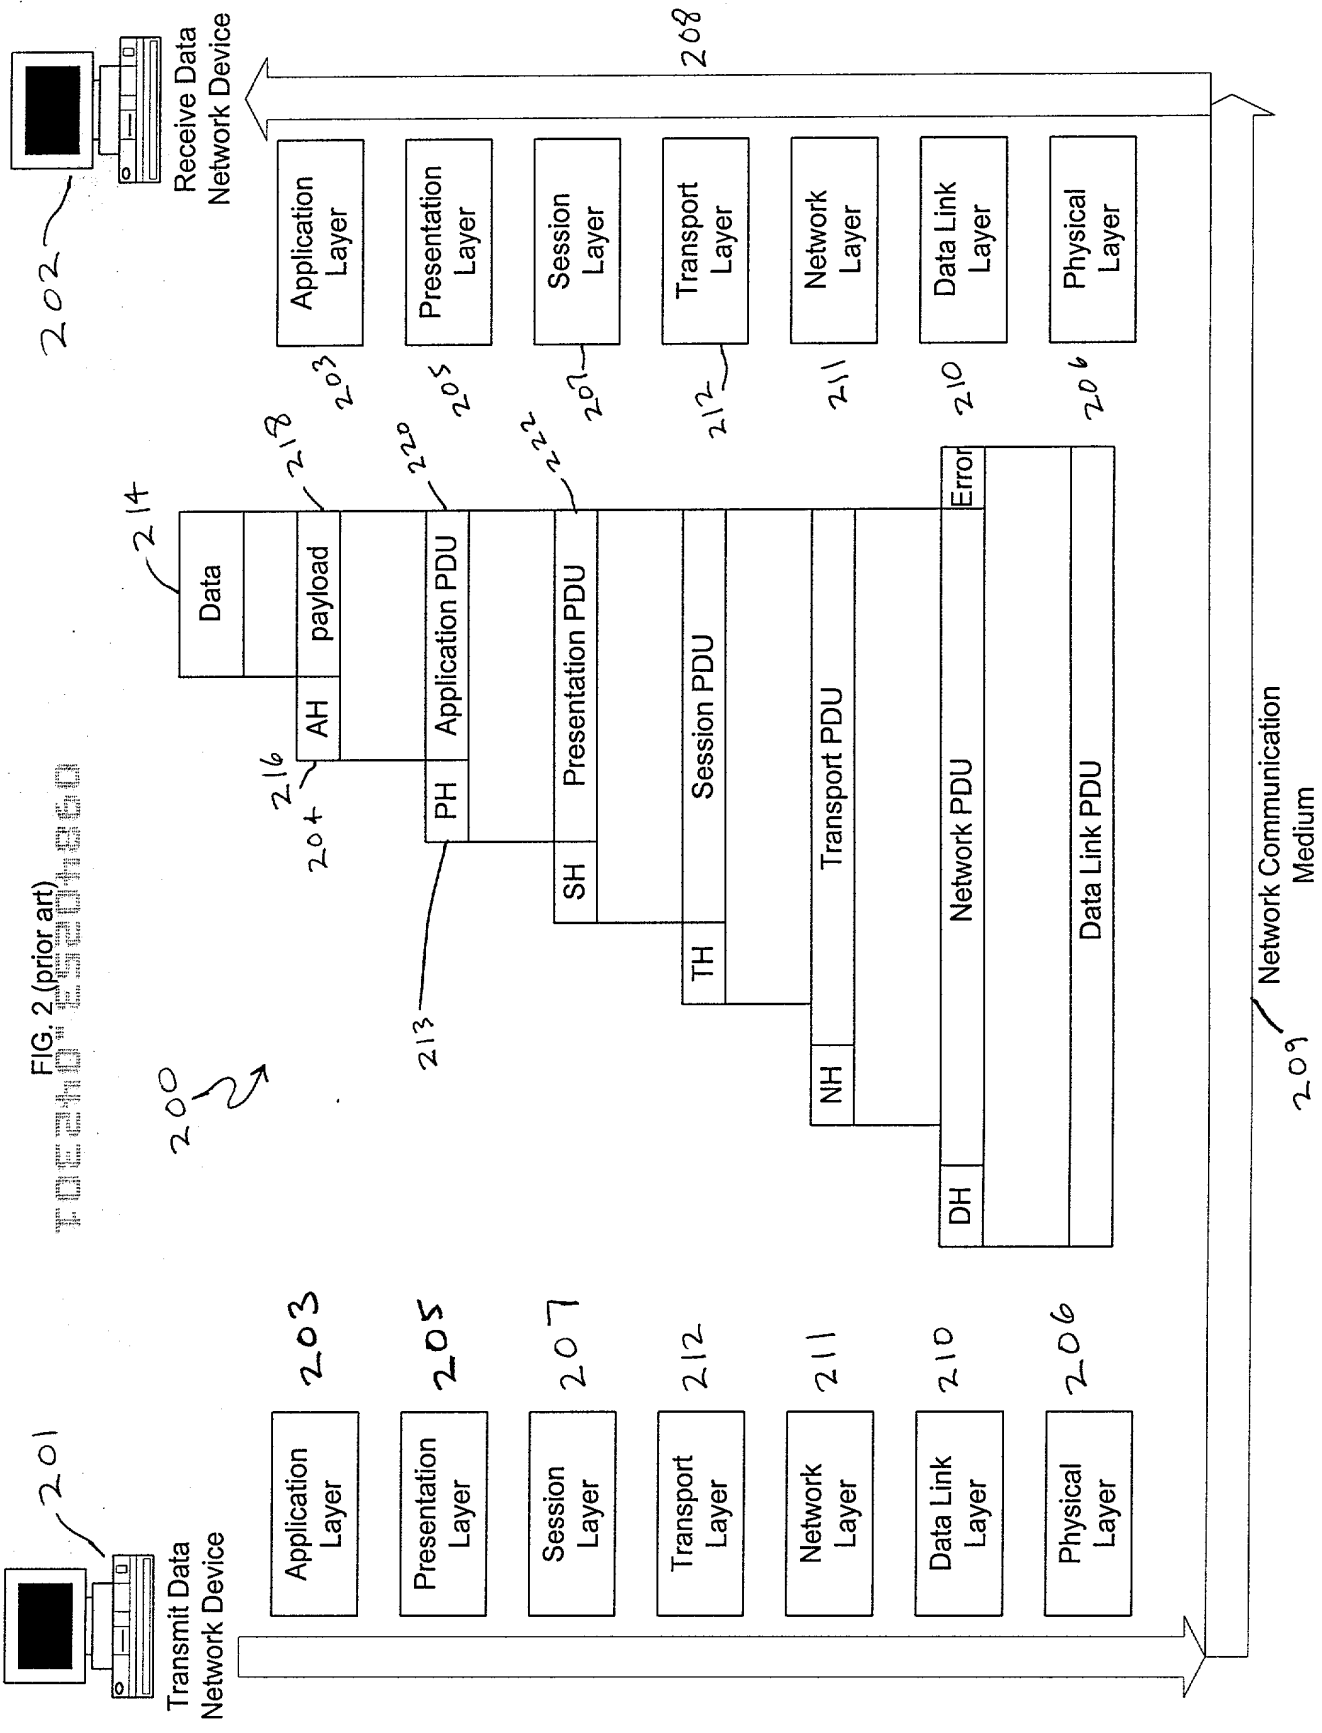


FIG. 3 (prior art)

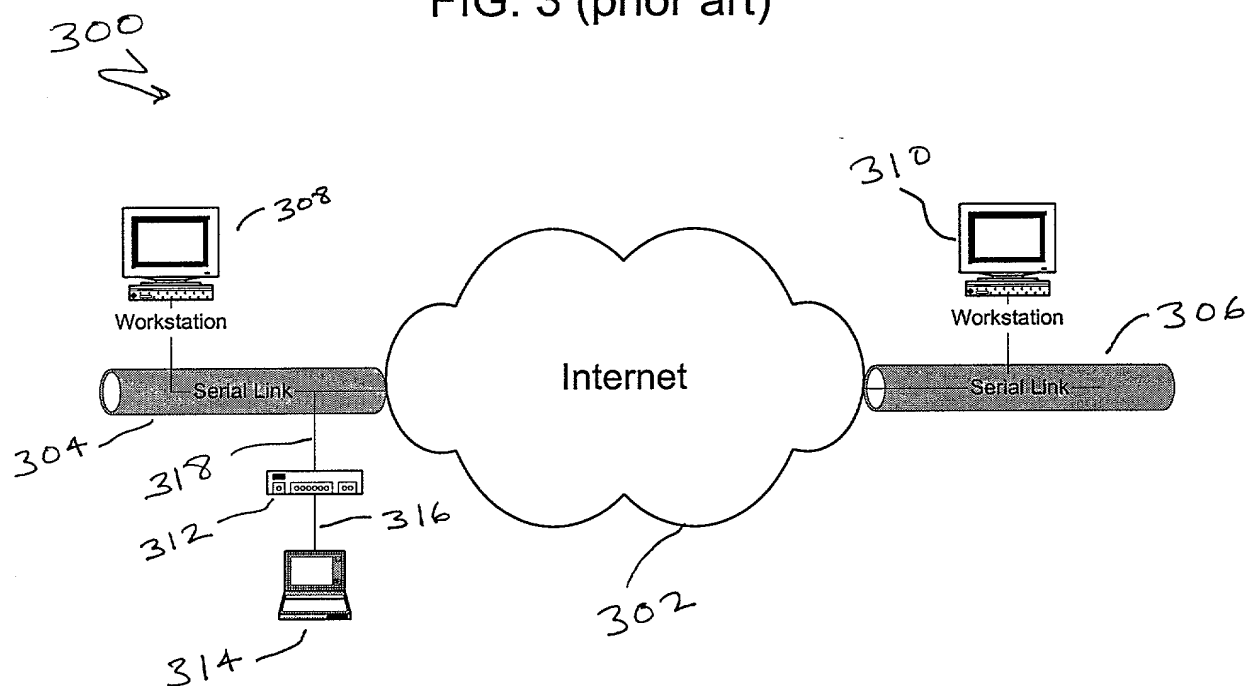


FIG. 4 (prior art)

400

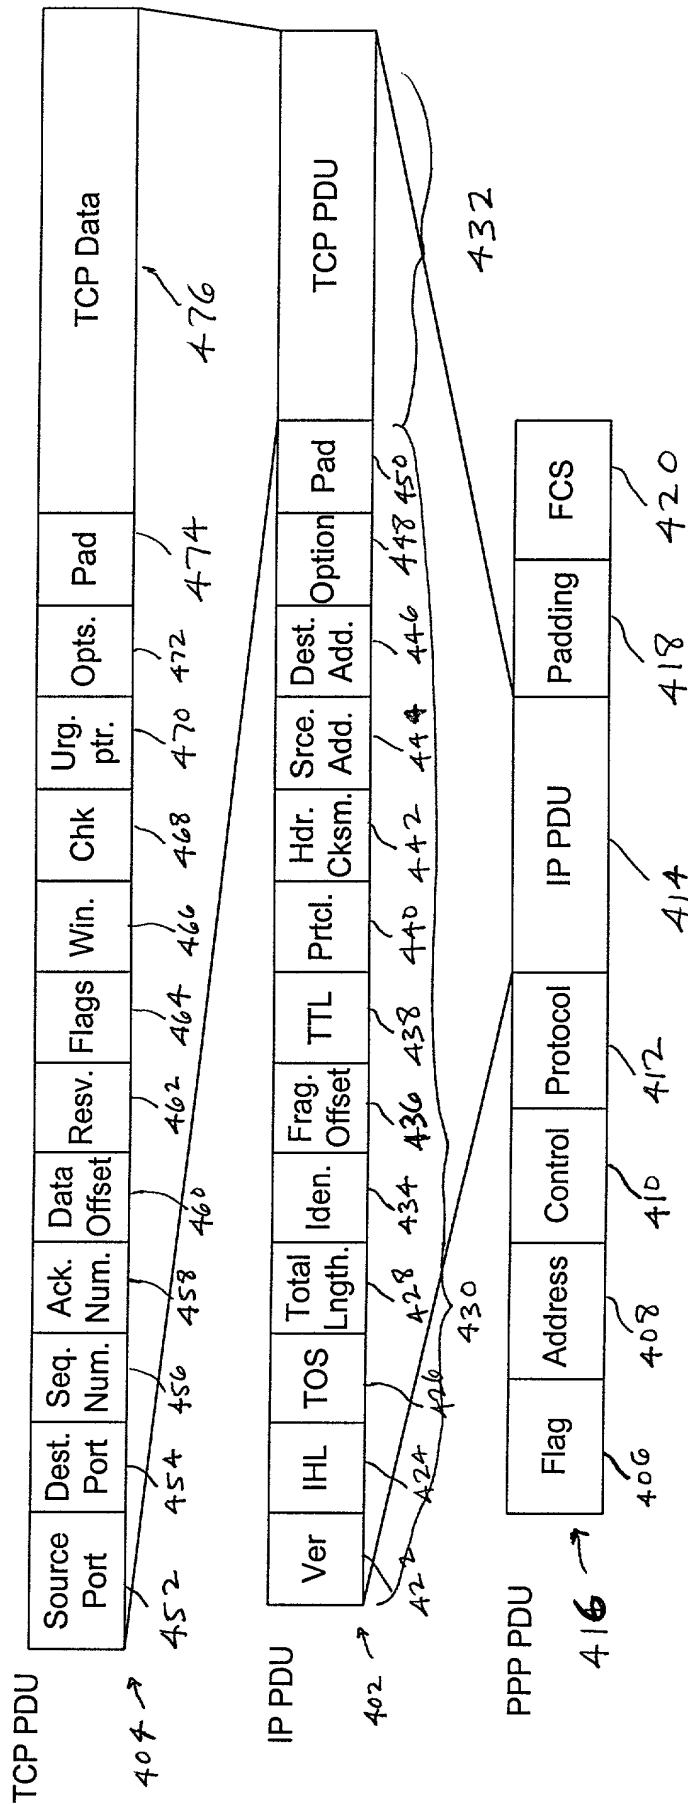


FIG. 5

500  
~

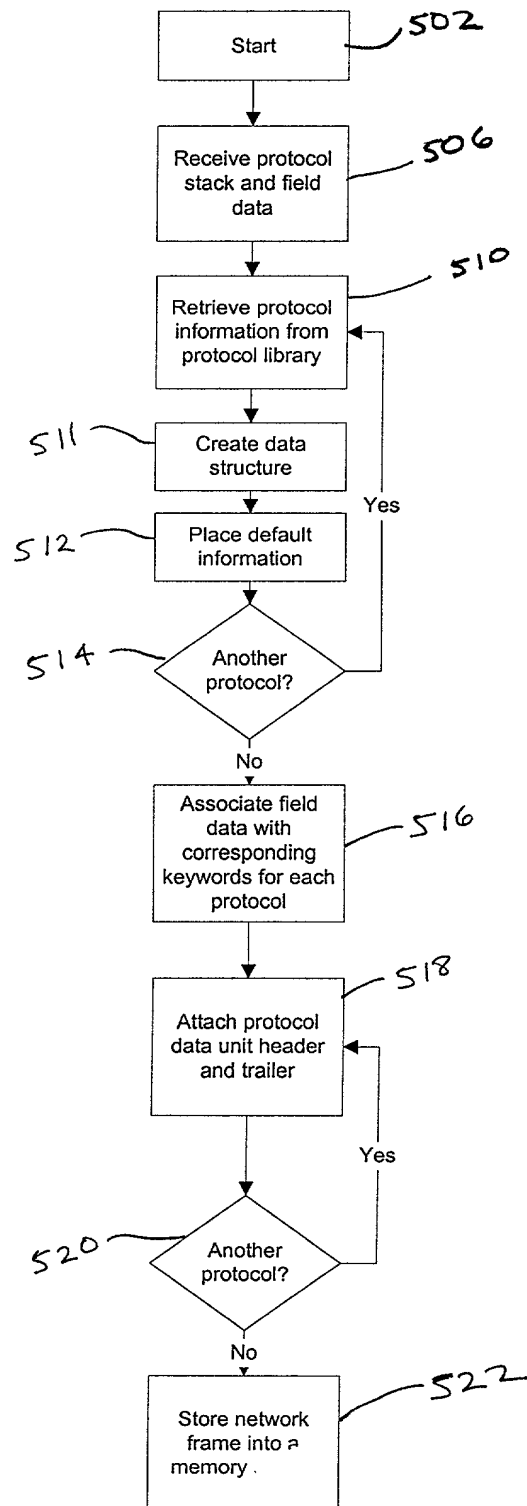
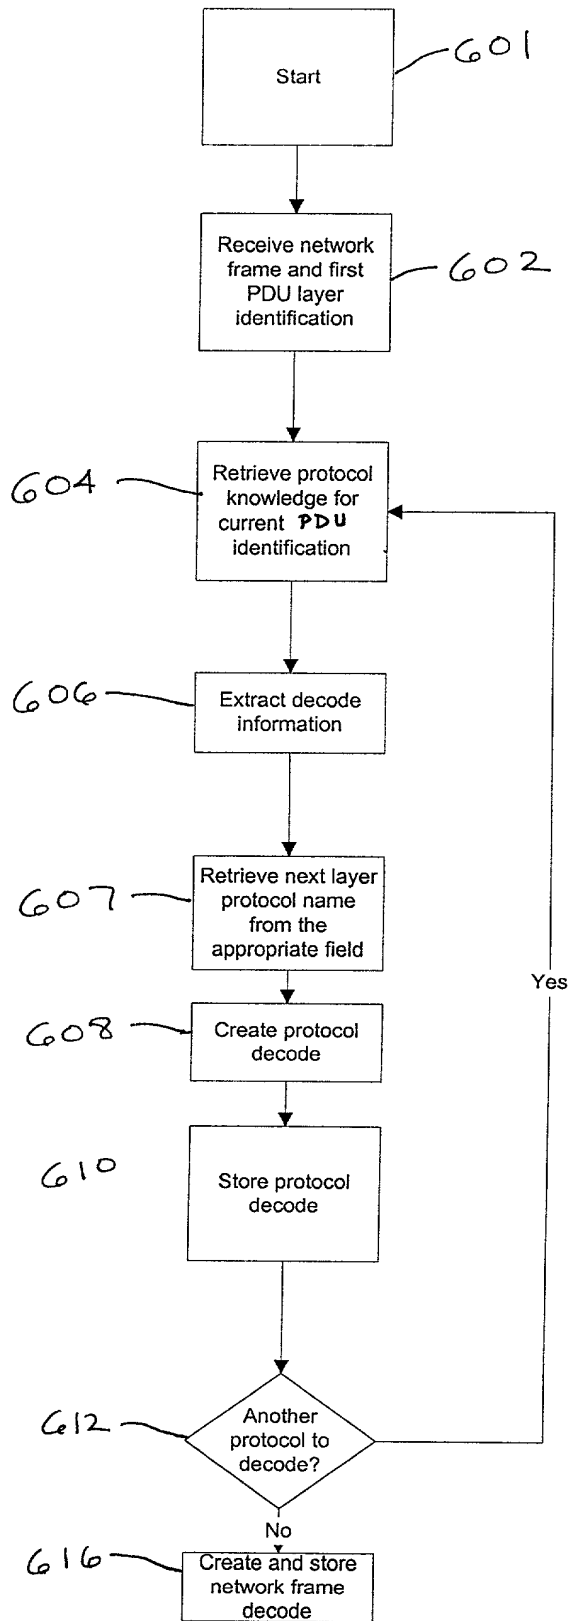


FIG. 5

FIG. 6

600  
↘



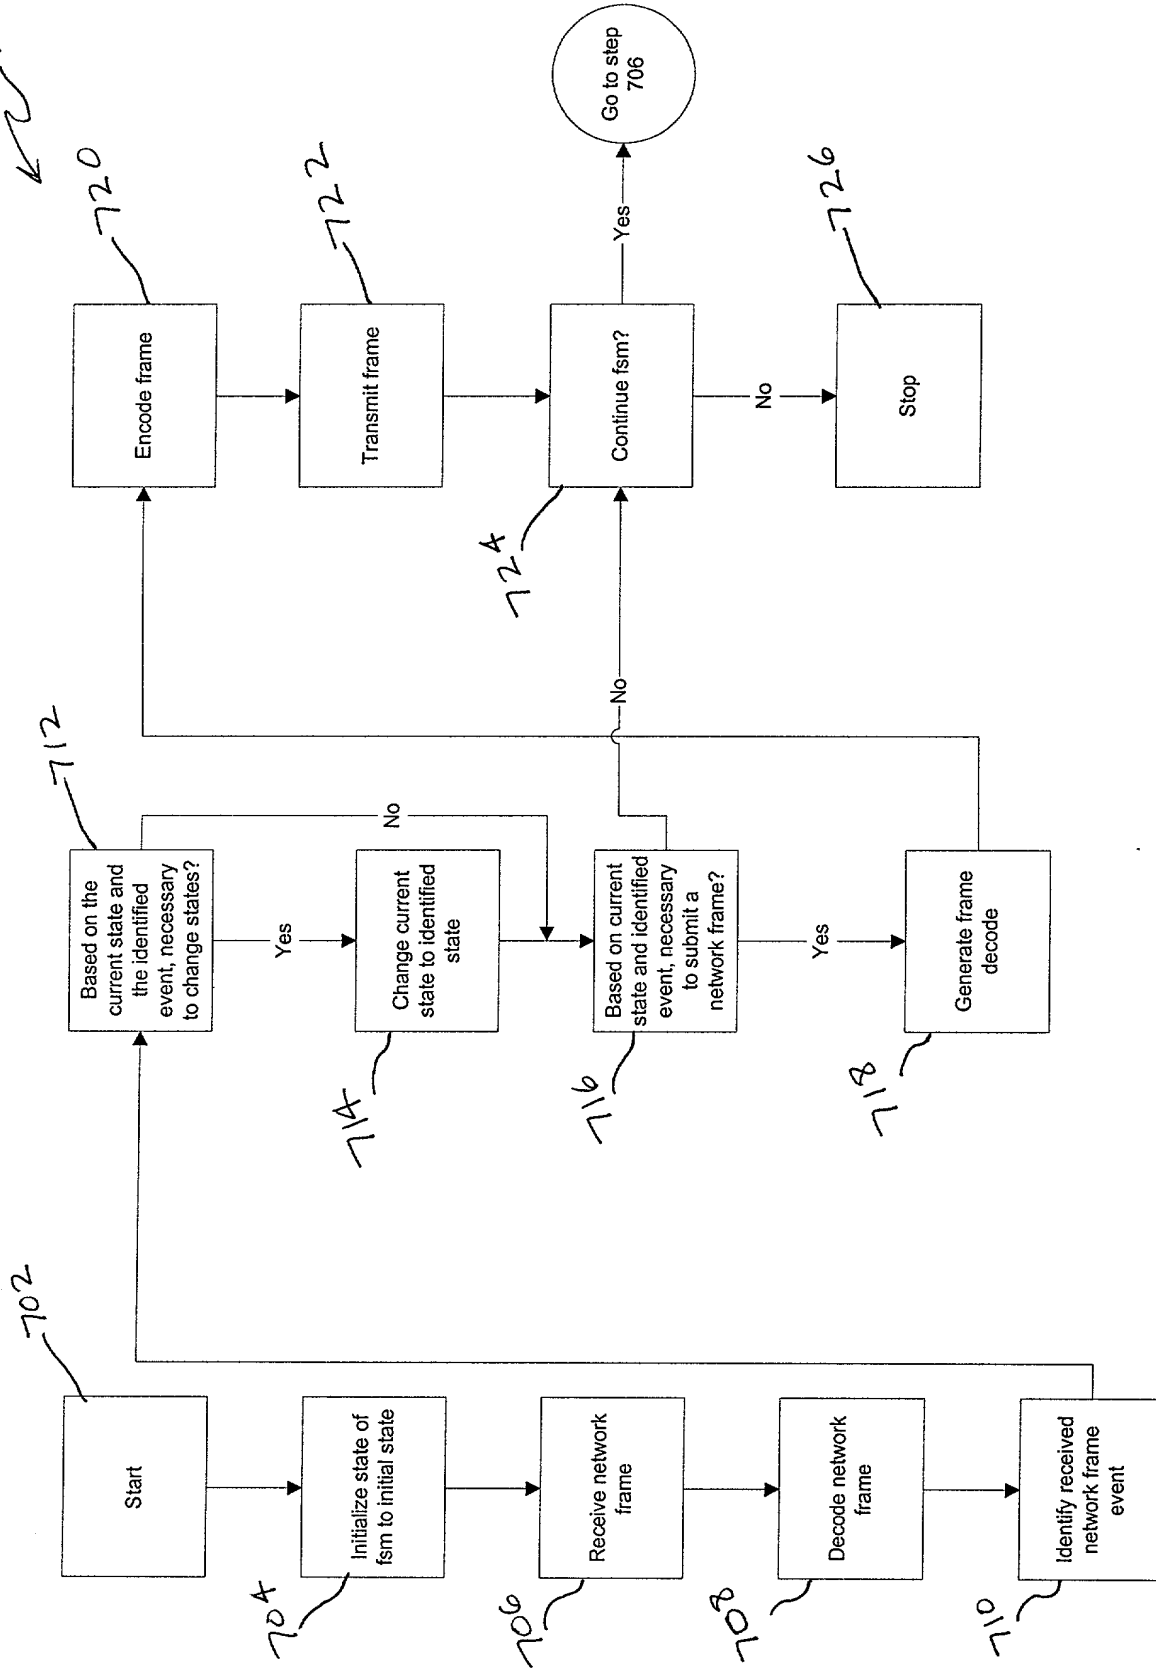


FIG. 8A

```

protocol "IP" {//-----
802  len=valueof(field "Total Length")*8
804  minLen=20*8 //just header
      maxLen=65535*8
      header "IP Header"
806  payload "IP Payload"
808

      header "IP Header" {//-----
810  812 len=valueof(field "Header Length")*32
      816 field "Version"
      818 field "Header Length"
814  compound_field "Type Of Service"
824  field "Total Length"

820  field "Identification" {len=16 default=291}
815  compound_field "Flags"
822  field "Fragment Offset" {len=13 desc="in 64 bits units"}
826  field "Time To Live" {len=8 default=30 desc="seconds"}
828  field "Protocol"
830  field "Header Checksum"
832  field "Source IP Address" {len=32 display=ipv4 field_type=must_encode}
834  field "Destination IP Address" {
      len=32
      display=ipv4
      field_type=must_encode
    }

816  repeat {
      len = (valueof (field "header Length") - 5 )*32 // includes padding
      compound_field "Options"
    }

    field "Version" {
      len=4
      default=4
      possible_values={
        0,15:"Reserved"
        1-3: "Unassigned"
        6-14:"Unassigned"
        4:"IP Internet Protocol"
        5:"ST ST Datagram Mode"
      }
    }
  }
}

```



FIG. 8B

```

field "Header Length" {
    len=4
    minValue=5
    desc="in 32 bit units"
    default=eval_fn(len, "IP", "IP Header", "/32")
}

field "Total Length" {
    minValue=20
    len=16
    desc="in octets include header length"
    default=eval_fn(len, "IP", "IP", "/8")
}

field "Header Checksum" {
    len=16
    default=eval_fn(checksum, "IP", "IP Header")
    display=hex
}

compound_field "Type Of Service" { //-----
    display=hex
    field "precedence" {
        len=3
        possible_values={
0:"Routine"
1:"Priority"
2:"Immediate"
3:"Flash"
4:"Flash override"
5:"CRITIC/ECP"
6:"Internetwork Control"
7:"Network Control"
}}
}

field "Delay" {
    len=1
    possible_values={0:"normal" 1:"low"}}

field "Throughput" {
    len=1
    possible_values={0:"normal" 1:"high"}}

field "Reliability" {
    len=1

```

FIG. 8C

```
possible_values={0:"Normal" 1:"High"}}
```

```
field "Monetary Cost" {
```

```
    len=1
```

```
possible_value={0:"normal" 1:"low"}}
```

```
field "Unused" {
```

```
    len=1
```

```
    possible_values={0:"Valid"}}
```

```
}// end of field "type of service" -----
```

```
compound_field "Flags" {
```

```
    len=3
```

```
    display=hex
```

```
field "Reserved" {
```

```
    len=1
```

```
    possible_values={0:"Valid"}}
```

```
field "Fragment" {
```

```
    len=1
```

```
    possible_values={0:"May Fragment" 1:"Don't Fragment"}}
```

```
field "Fragments" {
```

```
    len=1
```

```
    possible_values={0:"Last" 1:"More"}}
```

```
}
```

```
compound_field "Options" {/-------
```

```
optional = (valueof (field "Header Length") > 5)
```

```
compound_field "Option Tuple"
```

```
{
```

```
    len = 8;
```

```
    display=hex
```

```
field "Copied Flag" {
```

```
    len=1
```

```
    possible_values={
```

```
        0:"not copied into all fragments on fragmentation"
```

```
        1:"copied into all fragments on fragmentation"
```

```
}}
```

```
field "Option Class" {
```

```
    len=2
```

FIG. 8D

```

    possible_values={
    0:"control"
    1:"reserved for future use"
    2:"debugging and measurement"
    3:"reserved for future use"
    }}

field "Option Number" {
    len = 5
    field_type = mulopt_other_fld
    possible_values={
    0:"End of Option list"
    1:"No Operation"
    2:"Security"
    3:"Loose Source Routing"
    4:"Internet Timestamp"
    7:"Record Route"
    8:"Stream ID"
    9:"Strict Source Routing"
    }}
}

switch(valueof(field "Option Number")){
    0:null
    1:null
    2:compound_field "Security"
    3:compound_field "Loose Source Routing"
    9:compound_field "Strict Source Routing"
    7:compound_field "Record Route"
    8:compound_field "Stream ID"
    4:compound_field "Internet Timestamp"
}

compound_field "Security"{
    len=80
    field "Security length" {
        len=8
        possible_values={0x0b:"Valid"}}
    field "Security: Security"
    field "Compartments" {len=16}
    field "Handling Restrictions" {len=16}
    field "Transmission Control Code" {len=24}

    field "Security Security" {

```

FIG. 8E

```

len=16
possible_values={
0:"Unclassified"
0xf135:"Confidential"
0x789a:" EFTO"
0xbc4d:"MMMM"
0x5e26:"PROG"
0xaf13:"Restricted"
0xd788:"Secret"
0x6bc5:"Top Secret"
0x35e2,0x9af1,0x4d78,0x24bd,0x135e,0x89af,0xc4d6,0xe26b:
"Reserved for future use"
}}
}

compound_field "Strict Source Routing" {
len = (valueof(field "Strict Source Routing Length")-1)*8
field "Strict Source Routing Length" {len=8 }
field "Strict Source Routing Pointer" {len=8 minValue=4}

repeat {
len = (valueof(field "Strict Source Routing length")-3)*8
field "source address" {len=32 display=ipv4}
}
}

compound_field "Loose Source Routing" {
len = (valueof(field "Loose Source Routing length")-1)*8
field "Loose Source Routing length" {len=8 }
field "Loose Source Routing pointer" {len=8 minValue=4}
repeat {
len = (valueof(field "Loose Source Routing length")-3)*8
field "source address" {len=32 display=ipv4}
}
}

compound_field "Record Routing" {
len = (valueof(field "Record Routing length")-1)*8
field "Record Routing length" {len=8 }
field "Record Routing pointer" {len=8 minValue=4}
repeat {
len = (valueof(field "Record Routing length")-3)*8
field "source address" {len=32 display=ipv4}
}
}

```

09840253 042301

FIG. 8F

```

compound_field "Stream ID" {
    len = 24
    field "Stream ID length" {
        len=8
        default=4
        possible_values={
            0x04:"valid"
        }
    }
    field "ID" {len=16 default=4}
}

```

```

compound_field "Internet Timestamp" {
    field "Internet Timestamp Length" {len=8 }
    field "Internet Timestamp Pointer" {len=8 }
    field "Overflow" {
        len=4
        desc="number of IP modules that cannot register timestamps"
    }
    field "Flag" {
        len=4
        possible_values={
            0:"time stamps only, stored in consecutive 32-bit words"
            1:"each timestamp is preceded with internet address"
            3:"the internet address fields are prespecified"
        }
    }
} // end of Internet Timestamp
} // end of field "option" -----

} // end of field "IP" -----

```

```

field "Protocol" {

len=8
default=255
field_type = mulopt_prctl_fld
display=hex
possible_values={ //-----
    0:"HOPOPT (IPv6 Hop-by-Hop Option)"
    1:"ICMP (Internet Control Message)"
    2:"IGMP (Internet Group Management)"
    3:"GGP (Gateway-to-Gateway)"
    4:"IP (IP in IP encapsulation)"
    5:"ST (Stream)"
    6:"TCP"

```

FIG. 8F

FIG. 8G

- 7:"CBT"
- 8:"EGP (Exterior Gateway Protocol)"
- 9:"IGP (any private interior gateway)"
- 10:"BBN-RCC-MON (BBN RCC Monitoring)"
- 11:"NVP-II (Network Voice Protocol)"
- 12:"PUP"
- 13:"ARGUS"
- 14:"EMCON"
- 15:"XNET (Cross Net Debugger)"
- 16:"CHAOS"
- 17:"UDP"
- 18:"MUX (Multiplexing)"
- 19:"DCN-MEAS (DCN Measurement Subsystems)"
- 20:"HMP (Host Monitoring)"
- 21:"PRM (Field Radio Measurement)"
- 22:"XNS-IDP (XEROX NS IDP)"
- 23:"TRUNK-1 (Trunk-1)"
- 24:"TRUNK-2 (Trunk-2)"
- 25:"LEAF-1 (Leaf-1)"
- 26:"LEAF-2 (Leaf-2)"
- 27:"RDP (Reliable Data Protocol)"
- 28:"IRTP (Internet Reliable Transaction)"
- 29:"ISO-TP4 (ISO Transport Protocol Class 4)"
- 30:"NETBLT (Bulk Data Transfer Protocol)"
- 31:"MFE-NSP (MFE Network Services Protocol)"
- 32:"MERIT-INP (MERIT Internodal Protocol)"
- 33:"SEP ( Sequential Exchange Protocol)"
- 34:"3PC (Third Party Connect Protocol)"
- 35:"IDPR (Inter-Domain Policy Routing Protocol)"
- 36:"XTP (XTP)"
- 37:"DDP (Datagram Delivery Protocol)"
- 38:"IDPR-CMTP (IDPR Control Message Transport Protocol)"
- 39:"TP++ (TP++ Transport Protocol)"
- 40:"IL (IL Transport Protocol)"
- 41:"IPv6 (Ipv6)"
- 42:"SDRP (Source Demand Routing Protocol)"
- 43:"IPv6-Route (Routing Header for IPv6)"
- 44:"IPv6-Frag (Fragment Header for IPv6)"
- 45:"IDRP (Inter-Domain Routing Protocol)"
- 46:"RSVP (Reservation Protocol)"
- 47:"GRE (General Routing Encapsulation)"
- 48:"MHRP (Mobile Host Routing Protocol)"
- 49:"BNA"
- 50:"ESP (Encap Security Payload for IPv6)"
- 51:"AH (Authentication Header for IPv6)"
- 52:"I-NLSP (Integrated Net Layer Security TUBA)"



FIG. 8I

```

99:"APES (any private encryption scheme)"
100:"GMTP"
101:"IFMP (Ipsilon Flow Management Protocol)]"
102:"PNNI (PNNI over IP)"
103:"PIM (Protocol Independent Multicast)"
104:"ARIS"
105:"SCPS"
106:"QNX"
107:"A/N (Active Networks)"
108:"IPPCP (IP Payload Compression Protocol)"
109:"SNP (Sitara Networks Protocol)"
110:"Compaq-Peer (Compaq Peer Protocol)"
111:"IPX-in-IP"
112:"VRRP (Virtual Router Redundancy Protocol)"
113:"PGM (PGM Reliable Transport Protocol)"
114:"AHOP (any 0-hop protocol)"
115-254:"Unassigned"
255:"Reserved"
}} // end of field "protocol" -----

} // end of field "IP header" -----

payload "IP Payload" {
  switch(valueof(field "Protocol")) {
    1:protocol "ICMP"
    2:protocol "IGMP"
    6:protocol "TCP"
    17:protocol "UDP"
    46:protocol "RSVP"
    47:protocol "GRE"
    89:protocol "OSPF"
  }
} // end of packet "IP payload" -----
}

```

098402533042301  
 836  
 838



FIG. 9A

```

*/
/*****
Constants
*****/
//===== LCP Options=====
int OPT_PASSIVE    = 1;  // Don't die if we don't get a response
int OPT_RESTART    = 2;  // Treat 2nd OPEN as DOWN, UP
int OPT_SILENT     = 4;  // Wait for peer to speak first

//===== LCP States =====
int INITIAL_STATE = 0;
int STARTING_STATE = 1;
int CLOSED_STATE = 2;
int STOPPED_STATE = 3;
int CLOSING_STATE = 4;
int STOPPING_STATE = 5;
int REQ_SENT_STATE = 6;
int ACK_RCVD_STATE = 7;
int ACK_SENT_STATE = 8;
int OPENED_STATE = 9;

//===== LCP Events =====
int UP_EVENT = 0;
int DOWN_EVENT = 1;
int OPEN_EVENT = 2;
int CLOSE_EVENT = 3;
int TIMEOUT_POS_EVENT = 4;
int TIMEOUT_NEG_EVENT = 5;
int RCV_CFG_REQ_POS_EVENT = 6;
int RCV_CFG_REQ_NEG_EVENT = 7;
int RCV_CFG_ACK_EVENT = 8;
int RCV_CFG_NACK_EVENT = 9;
int RCV_TERM_REQ_EVENT = 10;
int RCV_TERM_ACK_EVENT = 11;
int RCV_UNKN_CODE_EVENT = 12;
int RCV_CODE_REJECT_POS_EVENT = 13;
int RCV_CODE_REJECT_NEG_EVENT = 14;
int RCV_ECHO_REQ_REPLY_EVENT = 15;

//===== Transition constants=====
int TRANSITON_CNST_FALSE = 0
int TRANSITON_CNST_TRUE = 1

```

902 fsm "LCP"

904 state INITIAL\_STATE

926 UP\_EVENT - CLOSED\_STATE  
 928 OPEN\_EVENT InitialStOpenEvent STARTING\_STATE  
 } // INITIAL

924

FIG. 9B

906~state STARTING\_STATE

```
{
  UP_EVENT
  \
    switch(enabledSilent())
  \
    {
      TRANSITON_CNST_TRUE:  StartingStUpEvEnabledSilentTRUE
STOPPED_STATE \
      TRANSITON_CNST_FALSE: StartingStUpEvEnabledSilentFALSE
REQ_SENT_STATE \
    }
  \
  CLOSE_EVENT -
  INITIAL_STATE

} // STARTING
```

908~state CLOSED\_STATE

```
{
  DOWN_EVENT - INITIAL_STATE
  OPEN_EVENT
  \
    switch(enabledSilent())
  \
    {
      TRANSITON_CNST_TRUE:  ClosedStOpenEvEnabledSilentTRUE
STOPPED_STATE \
      TRANSITON_CNST_FALSE: ClosedStOpenEvEnabledSilentFALSE
REQ_SENT_STATE \
    }
  \
  RCV_CFG_REQ_POS_EVENT ClosedStRcvCfgReqPosEv CLOSED_STATE
  RCV_CFG_REQ_NEG_EVENT ClosedStRcvCfgReqNegEv CLOSED_STATE
  RCV_CFG_ACK_EVENT ClosedStRcvCfgAckEv CLOSED_STATE
  RCV_CFG_NACK_EVENT ClosedStRcvCfgNackEv CLOSED_STATE
  RCV_CODE_REJECT_POS_EVENT RcvCodeRejectPosEv CLOSED_STATE
  RCV_CODE_REJECT_NEG_EVENT ClosedStRcvCodeRejectNegEv CLOSED_STATE
  RCV_ECHO_REQ_REPLY_EVENT RcvEchoReqReplyEv CLOSED_STATE

} // CLOSED
```

910~state STOPPED\_STATE

```
{
  DOWN_EVENT StoppedStDownEv STARTING_STATE
  OPEN_EVENT
  \
    switch(enabledRestart())
  \
    {
      TRANSITON_CNST_TRUE: StoppedStOpenEvEnabledRestartTRUE STOPPED_STATE
    }
  \
}
```

FIG. 9C

<pre>         }         \         CLOSE_EVENT         RCV_CFG_REQ_POS_EVENT         RCV_CFG_REQ_NEG_EVENT         RCV_CFG_ACK_EVENT         RCV_CFG_NACK_EVENT         RCV_CODE_REJECT_POS_EVENT         RCV_CODE_REJECT_NEG_EVENT         RCV_ECHO_REQ_REPLY_EVENT       </pre>	<pre>         -         StoppedStRcvCfgReqPosEv         StoppedStRcvCfgReqNegEv         StoppedStRcvCfgAckEv         StoppedStRcvCfgNackEv         RcvCodeRejectPosEv         StoppedStRcvCodeRejectNegEv         RcvEchoReqReplyEv       </pre>	<pre>         CLOSED_STATE         ACK_SENT_STATE         REQ_SENT_STATE         STOPPED_STATE         STOPPED_STATE         STOPPED_STATE         STOPPED_STATE         STOPPED_STATE       </pre>
--	--	---

```

    } // STOPPED
  
```

```

state CLOSING_STATE
{
  
```

<pre>         DOWN_EVENT         OPEN_EVENT         TIMEOUT_POS_EVENT         TIMEOUT_NEG_EVENT         RCV_TERM_ACK_EVENT         RCV_CODE_REJECT_POS_EVENT         RCV_CODE_REJECT_NEG_EVENT         RCV_ECHO_REQ_REPLY_EVENT       </pre>	<pre>         ClosingStDownEv         ClosingStOpenEv         ClosingStTimeoutPosEv         ClosingStTimeNegEv         ClosingStRcvTermAckEv         RcvCodeRejectPosEv         RcvCodeRejectNegEv         RcvEchoReqReplyEv       </pre>	<pre>         INITIAL_STATE         STOPPING_STATE         CLOSING_STATE         CLOSED_STATE         CLOSED_STATE         CLOSING_STATE         CLOSED_STATE         CLOSING_STATE       </pre>
--	---	--

```

} // CLOSING
  
```

```

state STOPPING_STATE
{
  
```

<pre>         DOWN_EVENT         CLOSE_EVENT         TIMEOUT_POS_EVENT         TIMEOUT_NEG_EVENT         RCV_TERM_ACK_EVENT         RCV_CODE_REJECT_POS_EVENT         RCV_CODE_REJECT_NEG_EVENT         RCV_ECHO_REQ_REPLY_EVENT       </pre>	<pre>         StoppingStDownEv         -         StoppingStTimeoutPosEv         StoppingStTimeNegEv         StoppingStRcvTermAckEv         RcvCodeRejectPosEv         RcvCodeRejectNegEv         RcvEchoReqReplyEv       </pre>	<pre>         STARTING_STATE         CLOSING_STATE         STOPPING_STATE         STOPPED_STATE         STOPPED_STATE         STOPPING_STATE         STOPPED_STATE         STOPPING_STATE       </pre>
---	---	--

```

} // STOPPING
  
```

```

state REQ_SENT_STATE
{
  
```

<pre>         DOWN_EVENT         CLOSE_EVENT         TIMEOUT_POS_EVENT         TIMEOUT_NEG_EVENT         RCV_CFG_REQ_POS_EVENT         RCV_CFG_REQ_NEG_EVENT         RCV_CFG_ACK_EVENT         RCV_CFG_NACK_EVENT         RCV_CODE_REJECT_POS_EVENT         RCV_CODE_REJECT_NEG_EVENT         RCV_ECHO_REQ_REPLY_EVENT       </pre>	<pre>         ReqSentStDownEv         ReqSentStCloseEv         ReqSentStTimeoutPosEv         ReqSentStTimeNegEv         ReqSentStRcvCfgReqPosEv         ReqSentStRcvCfgReqNegEv         ReqSentStRcvCfgAckEv         ReqSentStRcvCfgNackEv         RcvCodeRejectPosEv         RcvCodeRejectNegEv         RcvEchoReqReplyEv       </pre>	<pre>         STARTING_STATE         CLOSING_STATE         REQ_SENT_STATE         STOPPED_STATE         ACK_SENT_STATE         REQ_SENT_STATE         ACK_RCVD_STATE         REQ_SENT_STATE         REQ_SENT_STATE         STOPPED_STATE         REQ_SENT_STATE       </pre>
---	---	--

```

} // REQ_SENT_STATE
  
```

```

state ACK_RCVD_STATE
{
  
```

FIG. 9D

```

{
DOWN_EVENT      AckRcvdStDownEv      STARTING_STATE
CLOSE_EVENT      AckRcvdStCloseEv      CLOSING_STATE
TIMEOUT_POS_EVENT AckRcvdStTimeoutPosEv REQ_SENT_STATE
TIMEOUT_NEG_EVENT AckRcvdStTimeNegEv   STOPPED_STATE
RCV_CFG_REQ_POS_EVENT AckRcvdStRcvCfgReqPosEv OPENED_STATE
RCV_CFG_REQ_NEG_EVENT AckRcvdStRcvCfgReqNegEv ACK_RCVD_STATE
RCV_CFG_ACK_EVENT   AckRcvdStRcvCfgAckEv  REQ_SENT_STATE
RCV_CFG_NACK_EVENT  AckRcvdStRcvCfgNackEv  REQ_SENT_STATE
RCV_TERM_REQ_EVENT  AckRcvdStRcvTermReqEv  REQ_SENT_STATE
RCV_TERM_ACK_EVENT  -                    REQ_SENT_STATE
RCV_UNKN_CODE_EVENT -                    ACK_RCVD_STATE
RCV_CODE_REJECT_POS_EVENT RcvCodeRejectPosEv  REQ_SENT_STATE
RCV_CODE_REJECT_NEG_EVENT RcvCodeRejectNegEv  STOPPED_STATE
RCV_ECHO_REQ_REPLY_EVENT RcvEchoReqReplyEv   ACK_RCVD_STATE
} // ACK_RCVD_STATE

```

920 state ACK\_SENT\_STATE

```

{
DOWN_EVENT      AckSentStDownEv      STARTING_STATE
CLOSE_EVENT      AckSentStCloseEv      CLOSING_STATE
TIMEOUT_POS_EVENT AckSentStTimeoutPosEv ACK_SENT_STATE
TIMEOUT_NEG_EVENT AckSentStTimeNegEv   STOPPED_STATE
RCV_CFG_REQ_POS_EVENT AckSentStRcvCfgReqPosEv ACK_SENT_STATE
RCV_CFG_REQ_NEG_EVENT AckSentStRcvCfgReqNegEv REQ_SENT_STATE
RCV_CFG_ACK_EVENT   AckSentStRcvCfgAckEv  OPENED_STATE
RCV_CFG_NACK_EVENT  AckSentStRcvCfgNackEv  ACK_SENT_STATE
RCV_TERM_REQ_EVENT  AckSentStRcvTermReqEv  REQ_SENT_STATE
RCV_CODE_REJECT_POS_EVENT RcvCodeRejectPosEv  ACK_SENT_STATE
RCV_CODE_REJECT_NEG_EVENT RcvCodeRejectNegEv  STOPPED_STATE
RCV_ECHO_REQ_REPLY_EVENT RcvEchoReqReplyEv   ACK_SENT_STATE
} // ACK_SENT_STATE

```

922 state OPENED\_STATE

```

{
DOWN_EVENT      OpenedStDownEv      STARTING_STATE
OPEN_EVENT
\
\   switch(enabledRestart())
\
\   {
\
\   TRANSITON_CNST_TRUE:  OpenedStOpenEvEnabledRestartTRUE  OPENED_STATE
\
\   }
\
CLOSE_EVENT      OpenedStCloseEv      CLOSING_STATE
RCV_CFG_REQ_POS_EVENT OpenedStRcvCfgReqPosEv  ACK_SENT_STATE
RCV_CFG_REQ_NEG_EVENT OpenedStRcvCfgReqNegEv  REQ_SENT_STATE
RCV_CFG_ACK_EVENT   OpenedStRcvCfgAckEv  REQ_SENT_STATE
RCV_CFG_NACK_EVENT  OpenedStRcvCfgNackEv  REQ_SENT_STATE
RCV_TERM_REQ_EVENT  OpenedStRcvTermReqEv  STOPPING_STATE
RCV_TERM_ACK_EVENT  OpenedStRcvTermAckEv  REQ_SENT_STATE
}

```



FIG. 10


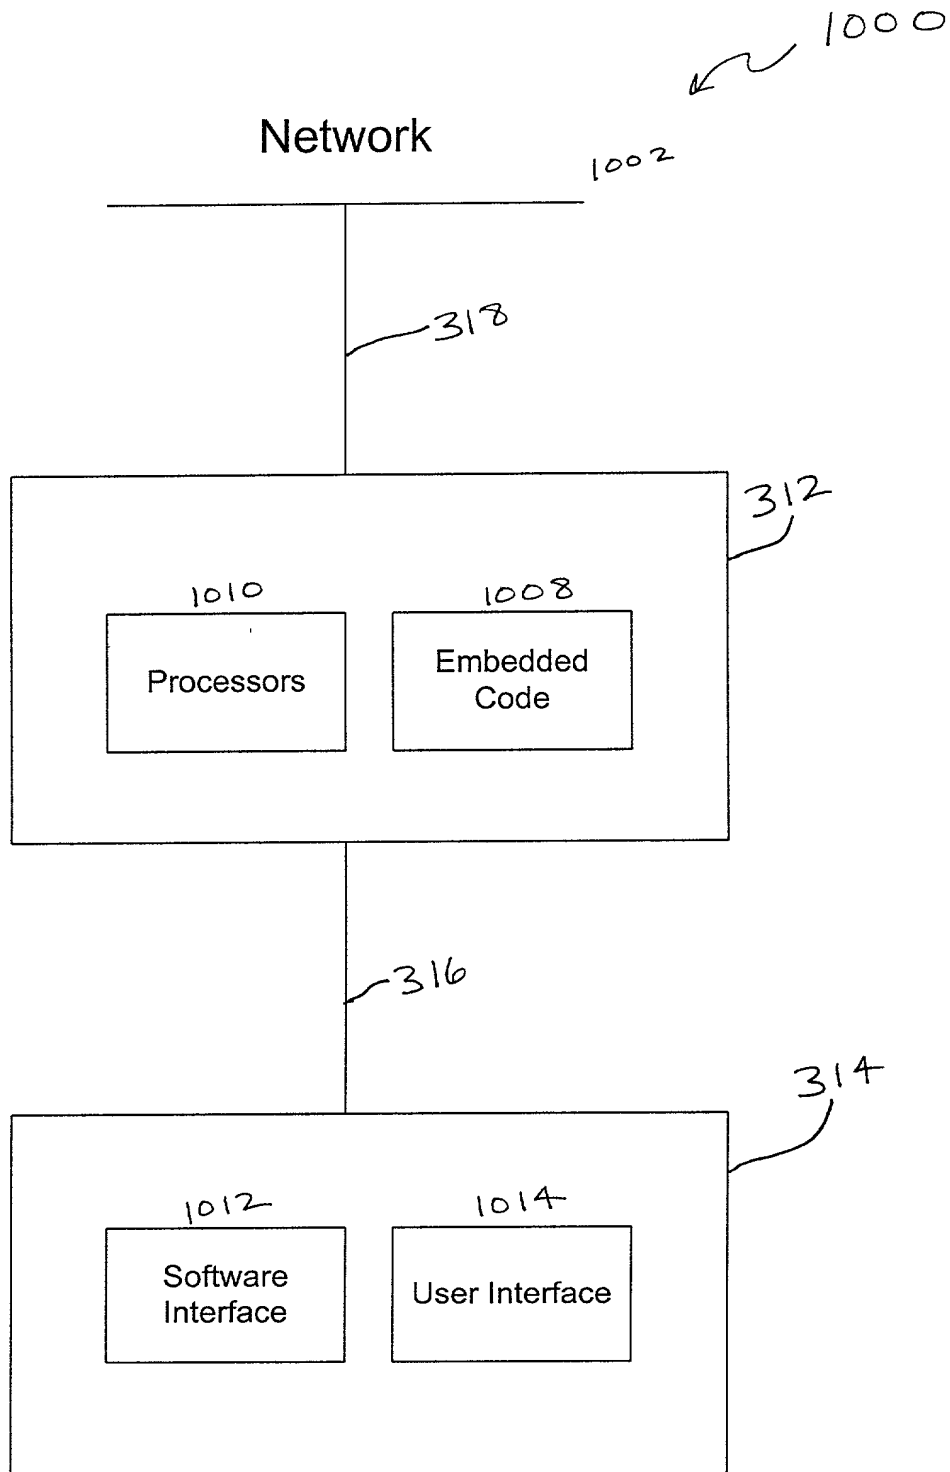


FIG. 11

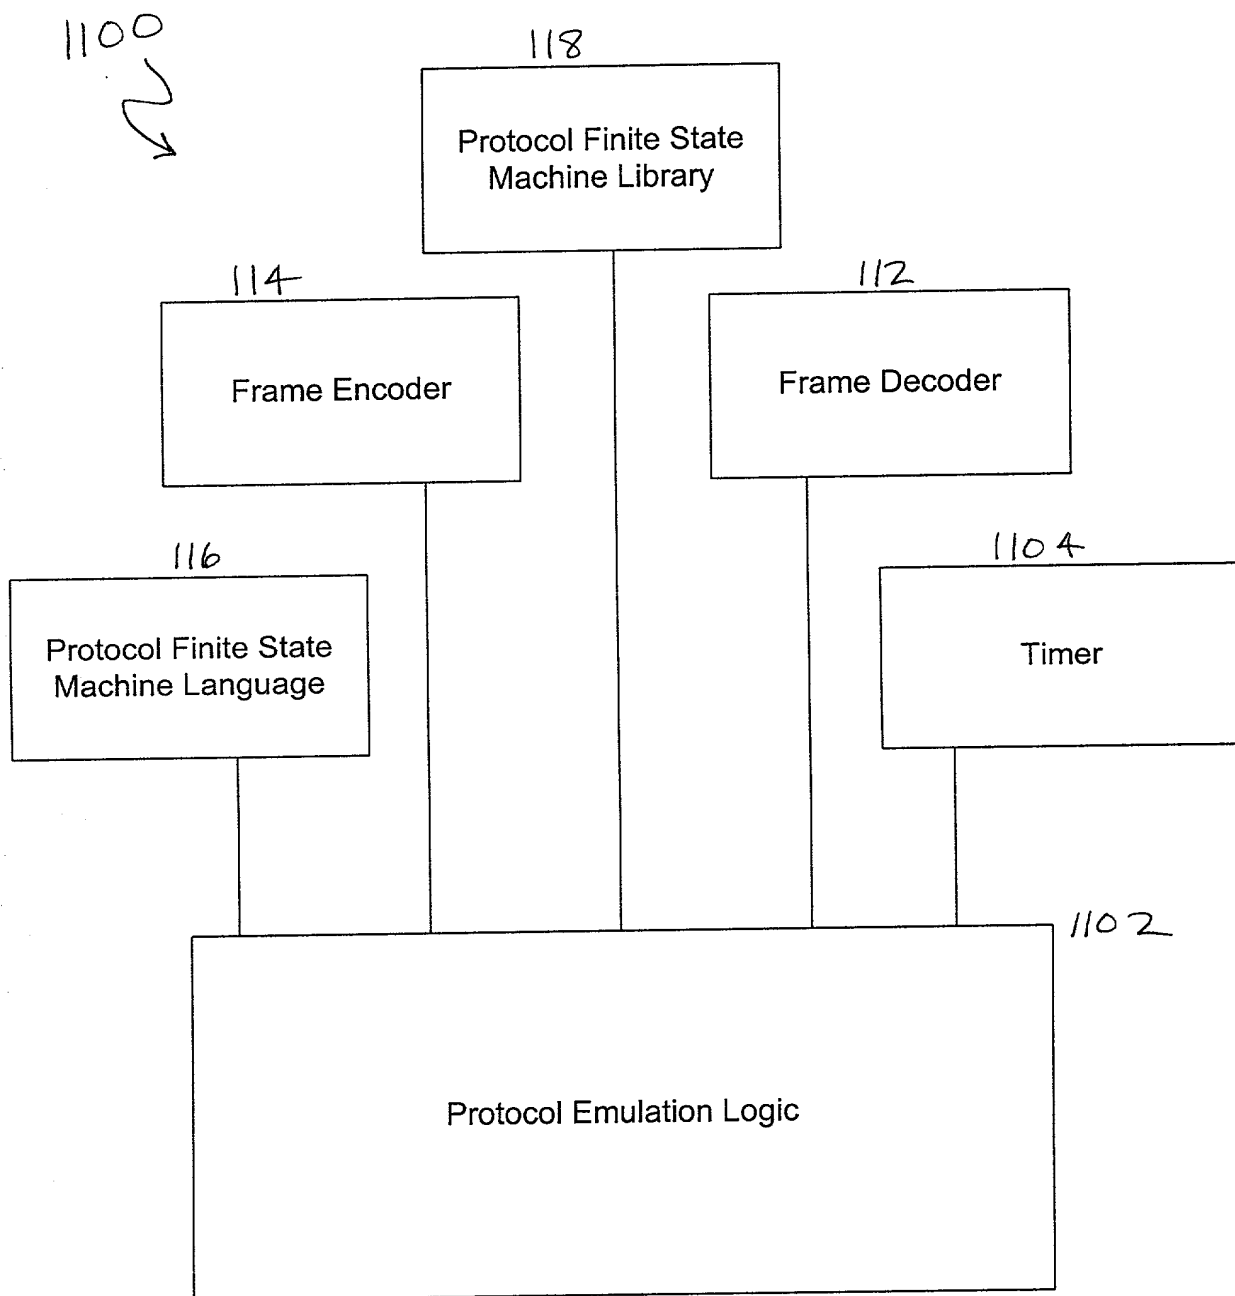

1202

	State					
	0	1	2	3	4	5
Events	Initial	Starting	Closed	Stopped	Closing	Stopping
Up	2	tc1,6	-	-	-	-
Down	-	-	0	1	0	1
Open	1	1	tc1,3/tc2,6	tc3,3r	5r	5r
Close	0	0	2	2	4	4
TO+	-	-	-	-	4	5
TO-	-	-	-	-	2	3
RCR+	-	-	2	8	4	5
RCR-	-	-	2	6	4	5
RCA	-	-	2	3	4	5
RCN	-	-	2	3	4	5
RTR	-	-	2	3	4	5
RTA	-	-	2	3	2	3
RUC	-	-	2	3	4	5
RXJ+	-	-	2	3	4	5
RXJ-	-	-	2	3	2	3
RXR	-	-	2	3	4	5



FIG. 12B

1204

Events	State			
	6 Req-Sent	7 Ack-Rcvd	8 Ack-Sent	9 Opened
Up	-	-	-	-
Down	1	1	1	1
Open	6	7	8	tc3, 9r
Close	4	4	4	4
TO+	6	6	8	-
TO-	3p	3p	3p	-
RCR+	8	9	8	8
RCR-	6	7	6	6
RCA	7	6	9	6
RCN	6	6	8	6
RTR	6	6	6	5
RTA	6	6	8	6
RUC	6	7	8	9
RXJ+	6	6	8	9
RXJ-	3	3	3	5
RXR	6	7	8	9

[p] Passive option  
[r] Restart option  
[s] Silent option

// Transition conditions

tc1 - (enabledSilent() == TRUE)  
tc2 - (enabledSilent() == FALSE)  
tc3 - (enabledRestart() == TRUE)

T06240" 05204860

FIG. 13

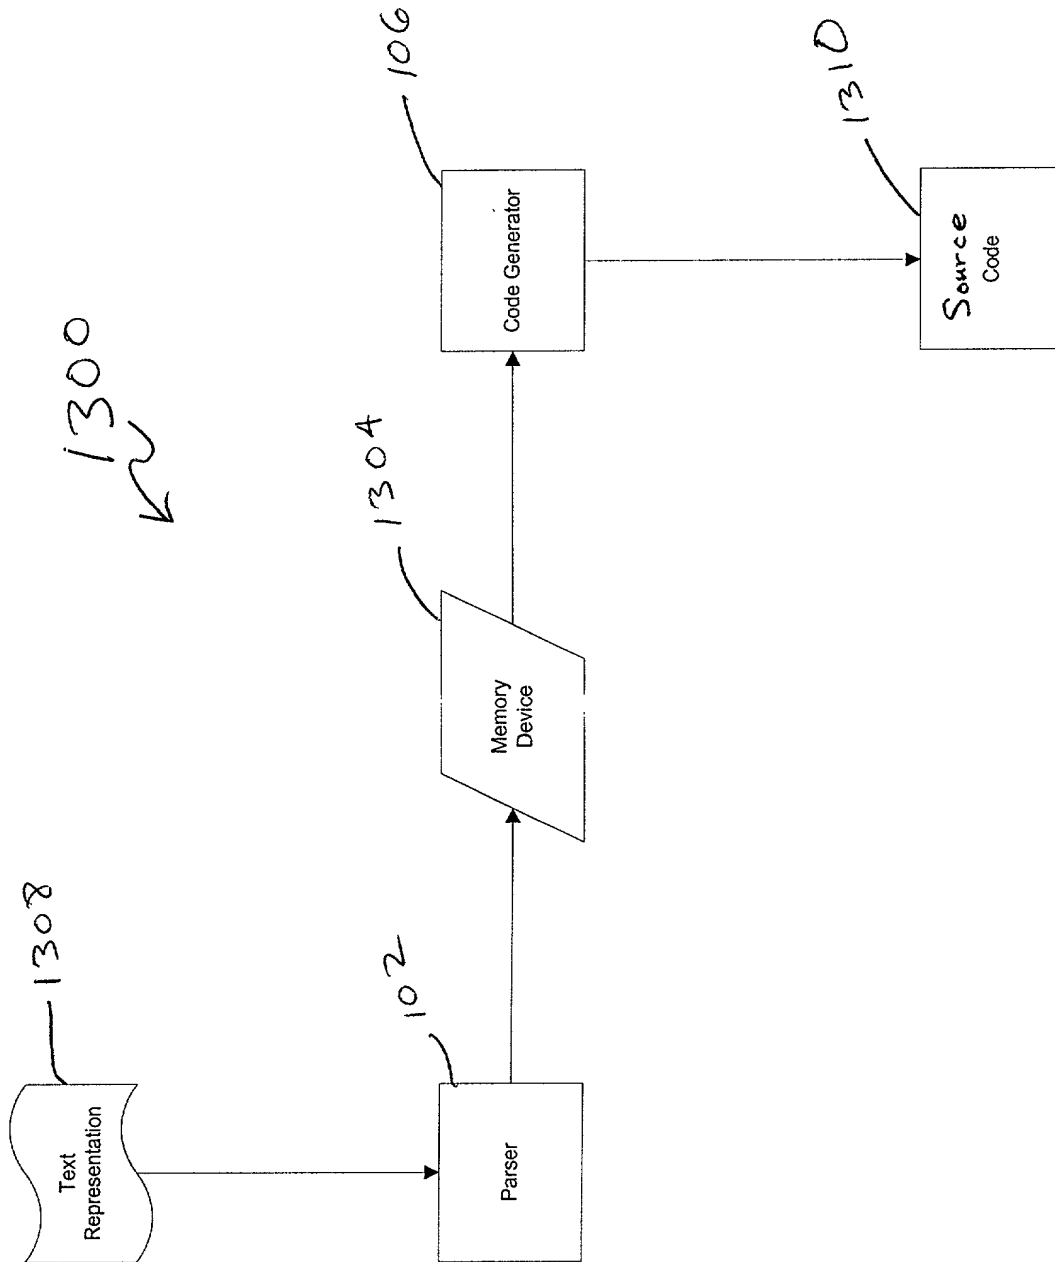


FIG. 14

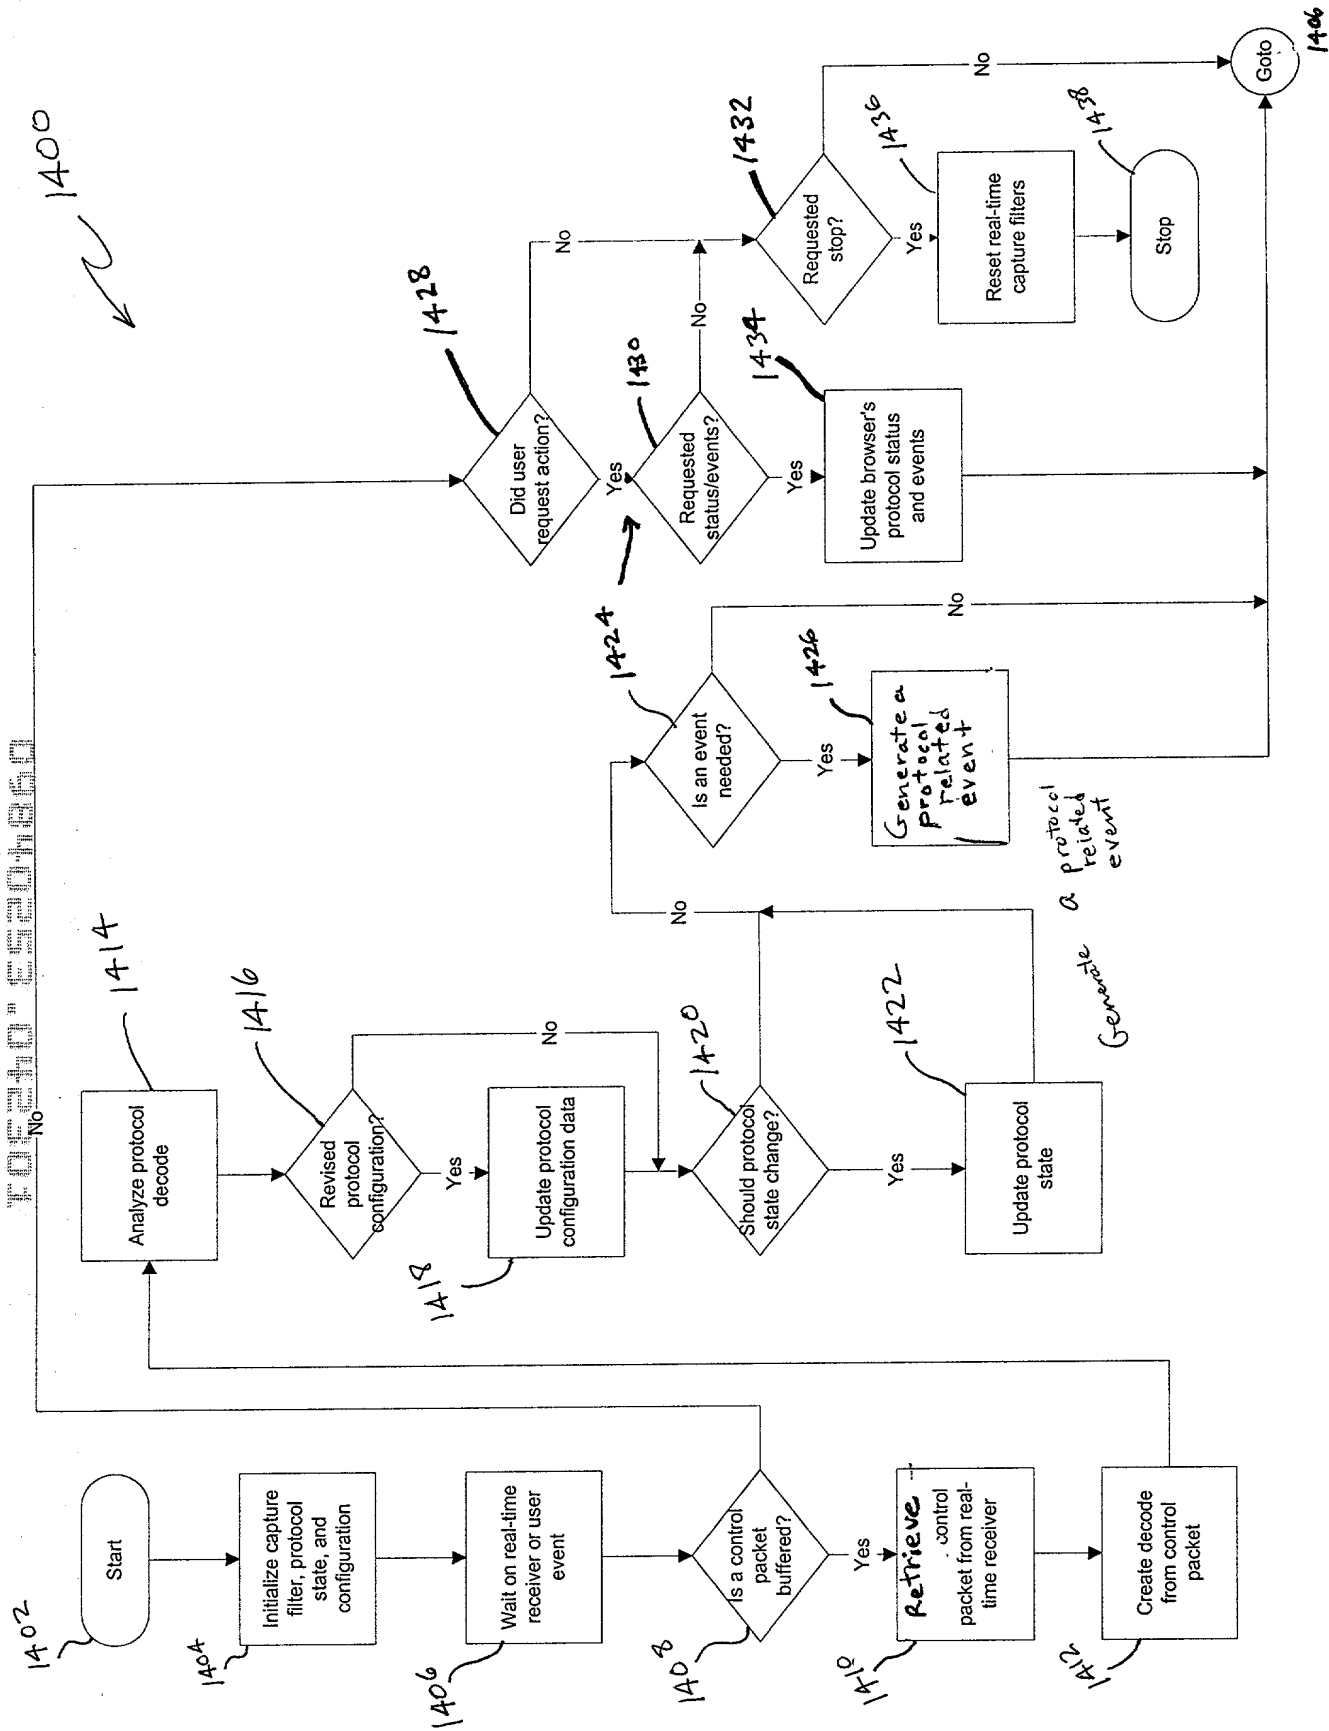


FIG. 15

1500

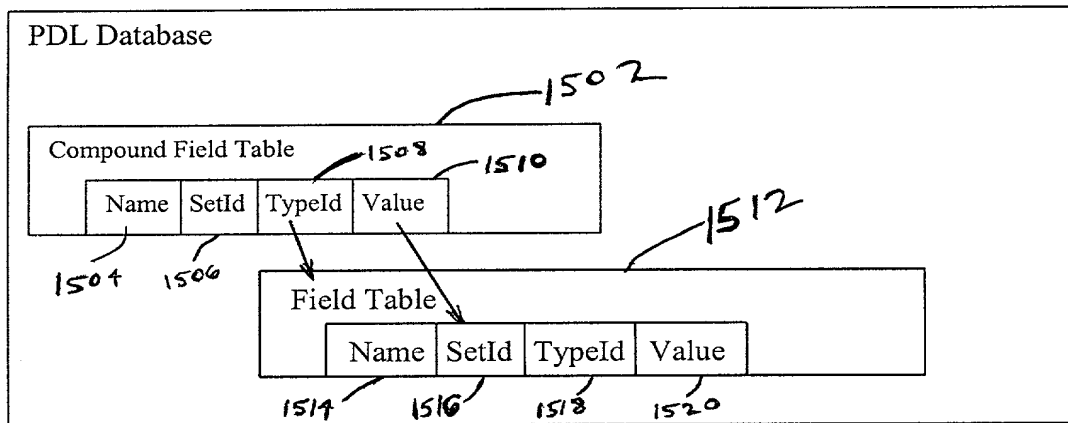


FIG. 16

Typeld	TypeName	TableName	Type	Comment
0	Start		Control	
0	ProtocolNames	ProtocolNames		
1	Protocol	Protocol	Compound	
2	Header	Header	Compound	
3	Payload	Payload	Compound	
4	Trailer	Trailer	Compound	
5	CompoundField	CompoundField	Compound	
6	Repeat	Repeat	Compound	
7	Switch	Switch	Compound	
8	PossibleValues	PossibleValues	Attribute	
9	Field	Field	Simple	
10	Len	Len	Attribute	
11	MinLen	Len	Attribute	
12	MaxLen	Len	Attribute	
13	Display	Display	Attribute	
14	Encode	Encode	Attribute	
15	Default	Default	Attribute	
16	Break	Len	Attribute	
17	Optional	Len	Attribute	
18	Offset	Len	Attribute	
19	Name	Name	Attribute	
20	Description	Description	Attribute	
21	String	String		
22	End	End	Control	
23	DecisiveField	Field	Simple	
24	FieldType	Attribute	Attribute	
28	MinVal	Attribute	Attribute	
29	MaxVal	Attribute	Attribute	
30	Count	Len	Attribute	

FIG. 17


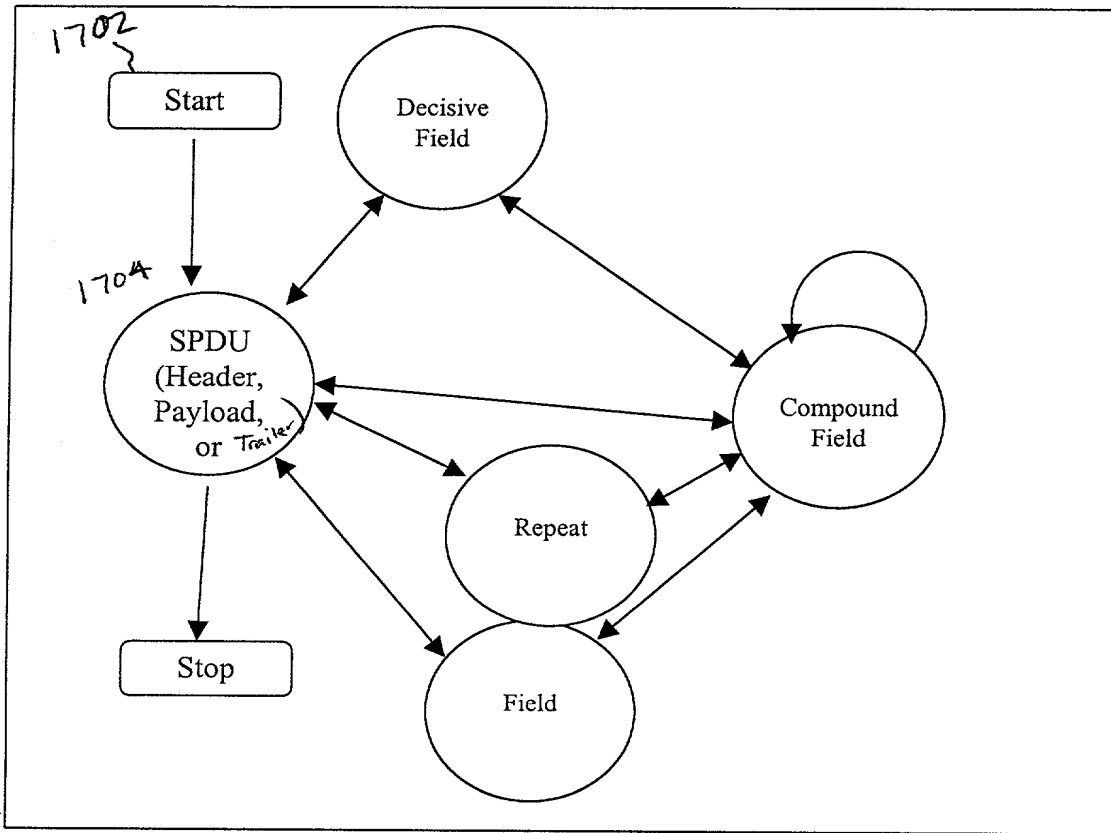


FIG. 18

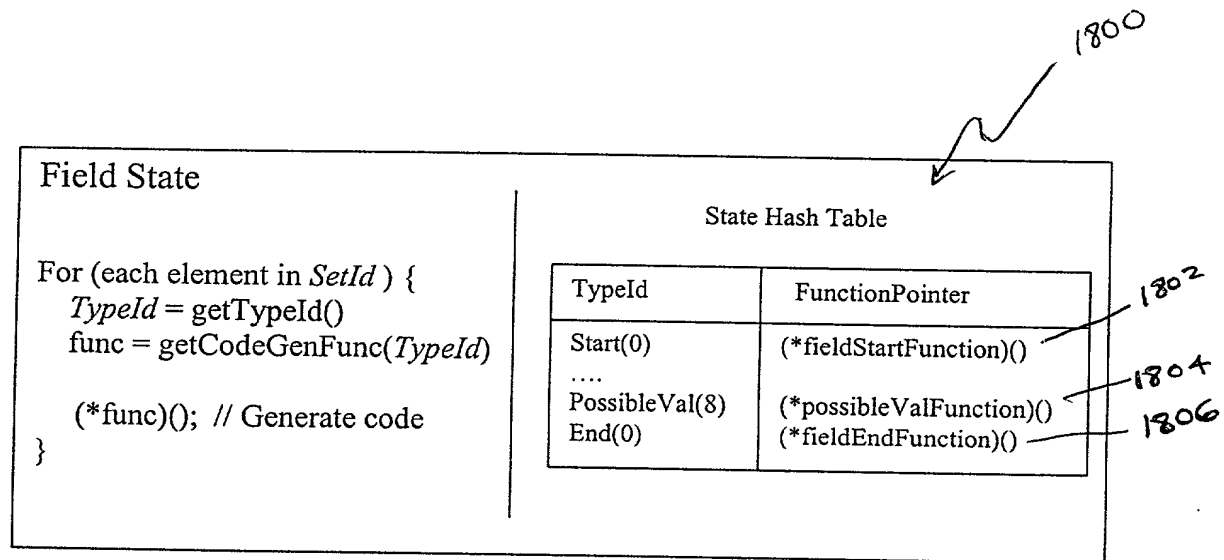

2025 RELEASE UNDER E.O. 14176

FIG. 19

1900

```

////////////////////////////////////
// Field: protocol.OSPF.header.OSPF Header.Field.Packet
//      Type.Packet Type
FldInfo packetType = new FldInfo();
packetType.setName(PACKET_TYPE_STR);
    
```

1902

(\*fieldStartFunction)()

```

// Possible Values of packetType
HashMap packetTypeValues
    = new HashMap(_hashMapInitialCapacity, _hashMapLoadFactor);
packetTypeValues.put( new FldValue(1),
    HELLO_STR);
packetTypeValues.put( new FldValue(2),
    DATABASE_DESCRIPTION_STR);
packetTypeValues.put( new FldValue(3),
    LINK_STATE_REQUEST_STR);
packetTypeValues.put( new FldValue(4),
    LINK_STATE_UPDATE_STR);
packetTypeValues.put( new FldValue(5),
    LINK_STATE_ACKNOWLEDGMENT_STR);
packetType.setPossibleValues(packetTypeValues);
    
```

1904

(\*possibleValFunction)()

```

flds.add(packetType);
// End Field: packetType
////////////////////////////////////
    
```

1906

(\*fieldEndFunction)()



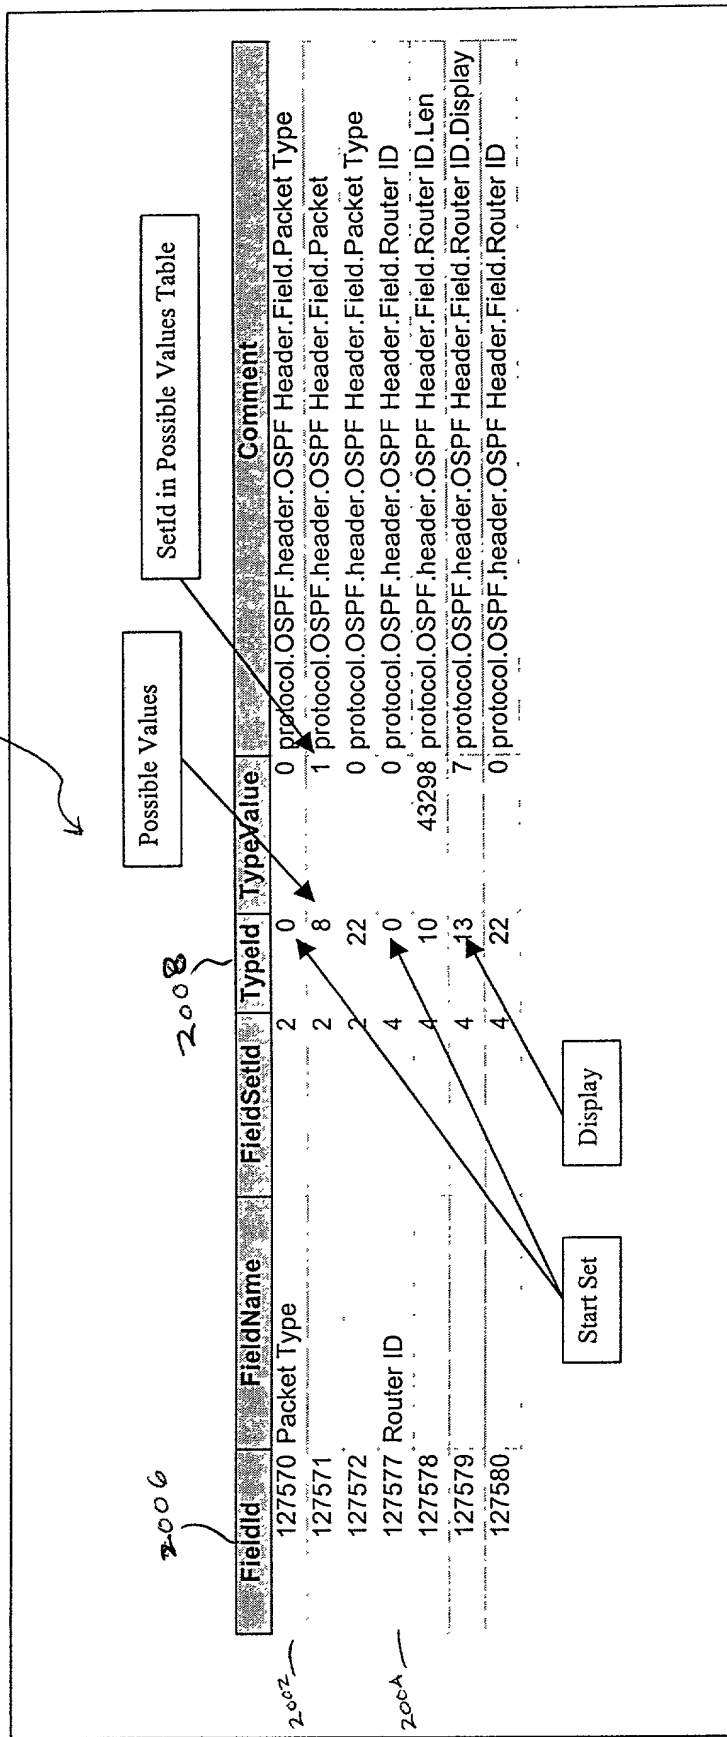


FIG. 21

Protocol	Status	Time	Mode
LCP	Open	09/04/00 08:01:03 AM	Emulate
IPCP	Negotiating	09/04/00 08:01:07 AM	Monitor
MPLSCP	Closed	09/04/00 08:01:05 AM	Monitor
RSVP	N/a	09/04/00 08:01:00 AM	Disabled

FIG. 22

	Rx1	Rx2
Current Status	Open	Negotiating
Loop-back	No	No
Unanswered Echo Requests	0	0
Maximum Receive Unit	512	1500
Asynchronous Character Map	0	0
Authentication Protocol	Unknown	Unknown
Quality Protocol	N/a	N/a
Protocol Field Compression	Off	Off
Address/Control Field Compression	Off	Off
Magic Number	0xFF	0x1FF
FCS Alternative	CCITT 32-bit	CCITT 32-bit

T09240" E9240960

FIG. 23

Time	Recv	Protocol	MsgType	Event	Synopsis
09/04/00 08:01:01 AM	Rx1	LCP	ConfigReq	Protocol Negotiating	ACComp:On,Pcomp:On,Magic:0x1ab82049
09/04/00 08:01:01 AM	Rx2	LCP	ConfigAck	Open Protocol	ACComp:On,Pcomp:On,Magic:0x4e3d9123
09/04/00 08:01:02 AM	Rx2	LCP	ConfigReq	Protocol Negotiating	ACComp:On,Pcomp:On,Magic:0x1ab82049
09/04/00 08:01:03 AM	Rx1	LCP	ConfigAck	Open Protocol	ACComp:On,Pcomp:On,Magic:0x1ab82049
09/04/00 08:01:04 AM	Rx2	IPCP	ConfigReq	Protocol Negotiating	Local IP: 198.85.38.199
09/04/00 08:01:06 AM	Rx1	IPCP	ConfigAck	Open Protocol	Local IP: 198.85.38.199
09/04/00 08:01:06 AM	Rx1	IPCP	ConfigReq	Protocol Negotiating	Local IP: 198.85. 34.45
09/04/00 08:01:06 AM	Rx2	IPCP	ConfigAck	Open Protocol	Local IP: 198.85. 34.45
09/04/00 08:01:10 AM	Rx2	MPLSCP	ConfigReq	Protocol Negotiating	
09/04/00 08:01:12 AM	Rx2	MPLSCP	TermReq	Close Protocol	
09/04/00 08:11:01 AM	Rx1	RSVP	Rx1	Rx1	Resv Request <session: 198.85.34.45 UDP port 14>
09/04/00 08:11:03 AM	Rx1	RSVP	Rx1	Rx1	Resv Confirm <session: 198.85.34.45 UDP port 14>
09/04/00 08:11:04 AM	Rx2	RSVP	Rx2	Rx2	Path Request <session: 198.85.38.199 UDP port 0x82A>
09/04/00 08:11:06 AM	Rx1	RSVP	Rx1	Rx1	Resv Error <session: 198.85. 38.199 UDP port 0x82A>
09/04/00 09:21:10 AM	Rx2	RSVP	Rx2	Rx2	Path Request <session: 198.85. 38.199 UDP port 0x82A>
09/04/00 09:21:12 AM	Rx2	RSVP	Rx2	Rx2	Resv Confirm <session: 198.85. 38.199 UDP port 0x82A>
09/04/00 09:21:30 AM	Rx1	RSVP	Rx1	Rx1	Path Tear <session: 198.85.34.45 UDP port 14>
09/04/00 09:21:32 AM	Rx2	RSVP	Rx2	Rx2	Resv Tear <session: 198.85.34.45 UDP port 14>
09/04/00 09:21:32 AM	Rx2	RSVP	Rx2	Rx2	Resv Tear <session: 198.85.34.45 UDP port 14>
09/04/00 11:44:30 PM	Rx1	IPCP	TermReq	Close Protocol	
09/04/00 11:44:31 PM	Rx1	IPCP	TermAck	Close Protocol	
09/04/00 11:44:32 PM	Rx1	LCP	TermReq	Close Protocol	
09/04/00 11:44:33 PM	Rx2	LCP	TermAck	Close Protocol	

T02210" E2204350